

19" Rack 1U~6U IPC Chassis

SH-7743

SH-8000ATX-R1

SH-8000-R2

19"/4U IPC Chassis


FEATURES

- CE approved 19" professional industrial case.
- Height-adjustable hold-down clamp protects plug-in cards from vibration.
- 8, 12, 14 slot ISA bus passive backplane, 14 slot VESA-bus backplane, baby-size AT motherboard can be replaced smoothly.
- Field-replaceable standard slim type (PS/2) 200W, 300W and 400W power supply.
- Lockable front door for security and dust-proof operation.
- Keyboard connectors available on both front and rear panel.
- Front cooling fan with removable air filter
- Aluminium front panel and handles
- The metallic parts of the units are made of high-grade, heavy-duty galvanised steel, electroplated with zinc to withstand corrosion, and are finished with a sturdy protective coating.



SH-7743

- Exchange 8+4, 14 slot rear panel (12 slot rear panel is optional)
- Space for Baby AT M/B and 8, 12, 14 slot ISA or PCI/ISA BP (optional)
- Space for PS/2 type 200~400W P/S
- Telescopic slider 18", 20" or 24" for SH-7743, SH-7745 and 20" or 24" for SH-7750 (optional)
- Dimension for: SH-7743 — 483 x 430 x 177mm
SH-7745 — 483 x 450 x 177mm
SH-7750 — 483 x 500 x 177mm
- Space for 2x 5.25" FDD, 1x 3.5" FDD & 2x 3.5" HDD

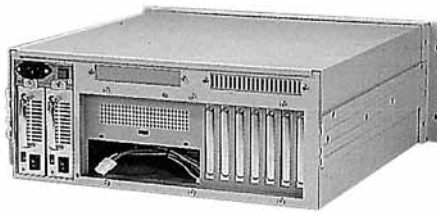

SH-8000ATX-R1

- Space for ATX M/B compatible
- Space for 250W ATX P/S Hot-Swap Redundant P/S
- Telescopic slider 18", 20" or 24" (optional)
- Dimension: 483 x 450 x 177mm
- Space for: 2x 5.25" FDD, 1x 3.5" FDD & 3x 3.5" HDD



SH-8000-R2

- Space 8 slot ISA BP and Baby AT M/B (optional)
- Space for 300~400W Hot-Swap Redundant P/S
- Telescopic slider 18", 20" or 24" (optional)
- Dimension: 483 x 450 x 177mm
- Space for: 2x 5.25" FDD, 1x 3.5" FDD & 3x 3.5" HDD

SH-1511

SH-1520

SH-3350

SH-1511

19"/1U IPC Chassis


- Mini board or CPU card (optional)
- Space for 60W power supply
- Drive space for 1 x 5.25" FDD/CD-ROM drive (open) and 3 x 3.5" HDD (closed)
- Keyboard connector
- Front cooling fan with removable filter
- The metallic parts of the unit are made of high-grade, heavy-duty galvanised steel, electroplated with zinc to withstand corrosion, and are finished with a sturdy protective coating
- Dimensions: 482.5mm x 365mm x 44mm



SH-1520

19"/2U IPC Chassis

- 5 slot Riser board which can fit any size and bus type industrial single board computer. Two boards available:
 - 2 x PICMG, 2 x PCI, 2 x ISA Riser board
 - 1 x PICMG, 4 x PCI slot Riser board
- 1 x 5.25" and 1 x 3.5" drive space at front panel for FDD, HDD or CD-ROM drive
- Extra reserve keyboard connector, Power ON/OFF switch and Reset switch at front panel
- Three LED indicators
- Space for 200~400W PS/2 power supply
- Three cooling fans
- Rugged all steel chassis to suit all industrial applications
- Dimensions: 482.5mm x 432mm x 88mm

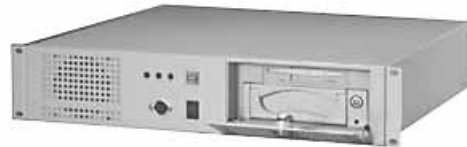

SH-3350

19" rack-mount 14"/15" Monitor Chassis

- Allows a 14" or 15" monitor to be installed easily
- Provides a space for five optional 8 x 8cm cooling fan
- Removable access front door
- Removable back door
- Dimensions: 483mm x 450mm 354.8mm (8U)

