


**EPM-1110-F**  
**EPM-1110-F2**  
**EPM-1110-FD**

**EPM-1110-F**

3.5" Front Access ATA to IDE Module with Card Protection Circuit

**Features**

- Complies with PCMCIA v.2.1/JEIDA 4.1 and CompactFlash Standard
- ATA/CompactFlash to Standard IDE Interface
- 40-pin IDE connector
- 4-pin standard power connector
- Supports Type I/II/III ATA Flash, ATA HDD and CompactFlash cards through a 68-pin
- PCMCIA connector or a 50-pin CompactFlash connector
- One Front slot
- Power Requirement: +5V @ 75mA
- Operating Temperature: 0°C to 60°C
- Dimension: 152mm x 101.6mm x 25.4mm

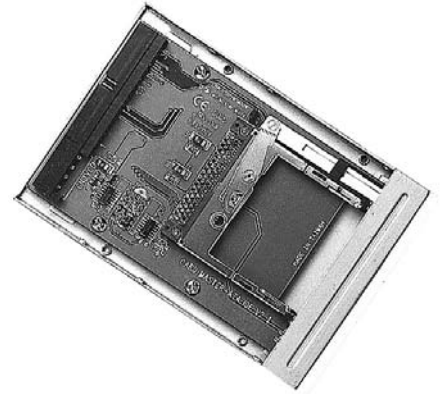


**EPM-1110-F2**

3.5" Front Access ATA to IDE Module with 2 Slots, Card Protection Circuit

**Features**

- Complies with PCMCIA v.2.1/JEIDA 4.1 and CompactFlash Standard
- ATA/CompactFlash to Standard IDE Interface
- 40-pin IDE connector
- 4-pin standard power connector
- Supports Type I/II/III ATA Flash, ATA HDD and CompactFlash cards through a 68-pin PCMCIA connector or a 50-pin CompactFlash connector
- Two Front slots
- Power Requirement: +5V @ 75mA
- Operating Temperature: 0°C to 60°C
- Dimension: 152mm x 101.6mm x 25.4mm

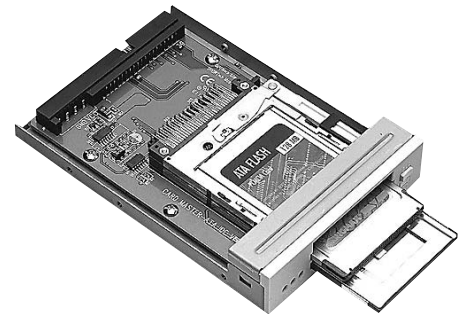

**EPM-1110-FD**

3.5" Front Access ATA to IDE Module with Floppy

**Features**

- Complies with PCMCIA v.2.1/JEIDA 4.1 and CompactFlash Standard
- ATA/CompactFlash to Standard IDE Interface
- 40-pin IDE connector
- 4-pin standard power connector
- Supports Type I/II/III ATA Flash, ATA HDD and CompactFlash cards through a 68-pin PCMCIA connector or a 50-pin CompactFlash connector
- One Front slot
- 2 in 1, combining one FDD and one ATA to IDE drive
- Power Requirement: +5V @ 230mA
- Operating Temperature: 0°C to 60°C
- Dimension: 152mm x 101.6mm x 25.4mm

